




TERTIARY IMPACT CRUSHER

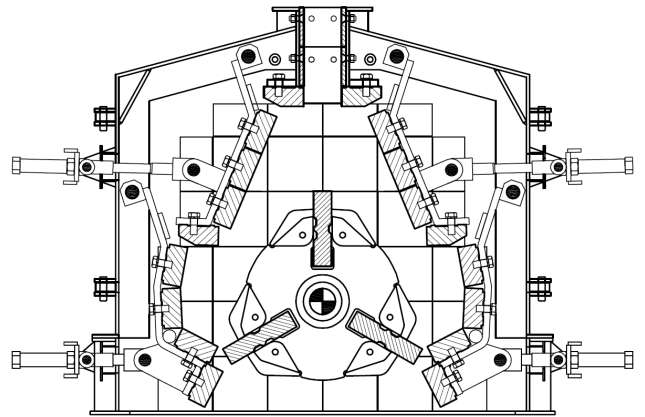

SERIES MAR		10.50	10.100	10.150
Feed opening	mm	500 x 170	1.000 x 170	1.500 x 170
Rotor (Ø x large)	mm	1.000 x 500	1.000 x 1.000	1.000 x 1.500
Max input size				
with products very tenacious	mm	80	80	80
with products slightly tenacious	mm	100	120	120
Recommended engine	kW	132	250	315
	cv	180	340	430
Production*, as setting	t/h	70	160	240
Approximate weight	kg	5.800	8.900	13.000

* values are indicatives only (calculated for material density of 1,6 t/m³)